

MULTIFOLD FUNCTIONALITY WITH

VIBRANT COLOUR

























































bizhub c368/c308/c258



The simplicity and usability to fit in any working environment

The product design

The bizhub C368 series adopts easy and intuitive INFO-Palette design with smart user interface. You get the same user experience through seamless operation across the PCs, tablets or smartphones.



The 9 inch operation panel

The 9 inch operation panel provides user friendly interface. There are 4 hard menu keys at the bottom of the panel, combining it with on-screen soft menu keys allows user to register for functions such as copy, scan/fax, preview or soft numeric keypad.

The screen display function can be enlarged and screen display colour can be reversed for ease of use.



Soft menu keys will appear by tapping on the screen tab

Widgets function

The new bizhub C368 series comes with embedded widget application where users can install and execute within the MFP operation panel. Text boxes, icons or GIF animations can be configured and used for internal communication, messages and rules.



Print from anywhere, anytime with the most advanced wireless, mobile and cloud technology

To connect with Android devices

The operation panel is equipped with newly embedded Mobile Touch Area to support NFC (Near Field Communication) connection for Android devices. Pairing can be performed, through PageScope Mobile (PSM), by touching the area with Android device. First select the files on PSM and then touch the device to the operation panel to perform print or scan

- *1 NFC connection requires Android OS 4.4 or higher to be installed.
 *2 Wireless LAN environment is required to perform touch to print and scan



To connect with iOS devices

For the iOS devices, you can search and register nearby bizhub into the PageScope Mobile (PSM)³ via Bluetooth LE (BLE)⁴ technology. iOS devices can also be used to log-into bizhub via BLE connection. Selected files on PSM can be printed'5 directly or scan'5 files to iOS devices

- *3 PageScope Mobile for iPhone / iPad version 5.0 or higher is required.
- *4 Optional Device Connection I/F Kit EK-609 is required.
 *5 Wireless LAN requirement is required to perform print & scan.

Wireless LAN (AP mode) support

Make your bizhub wireless LAN Access Point to wirelessly connect mobile devices. Devices thus will not only able to connect directly with bizhub but are also securely separated from existing LANs.

PageScope Mobile will enable more convenience as wireless set up can be completed between a mobile device and bizhub by reading the QR code that is displayed on the machine panel.

*6 Optional Upgrade Kit UK -212 is required.

QR code display screen







*In AP mode (base unit), simultaneous connections can be made with up to 5 devices.

To connect instantly without print drivers to the industry standard mobile technologies

AirPrint

Apple's standard printing system is compatible with iOS 4.2 and Mac OS 10.7 or later. A compatible printer on your wireless LAN



Mopria Print Service

Wireless printing technology established by Mopria Alliance. It allows you to print from devices installed with Android 4.4 or later.



Google Cloud Print

A cloud print service provided by Google. You can print from any location via the internet regardless of OS or device type.



* Google Cloud Print Setup and Google account registration are required. * Optional Upgrade Kit UK-211 is required.

Konica Minolta Print Service Print directly to bizhub via a wireless LAN from all apps that supports



Android's print function.

PageScope Mobile

Konica Minolta's proprietary mobile print application allows usage of wide range of bizhub functions such as duplex print, security print, staple and punch.



Standard web browser

The multi-touch UI in the operational panel can be used to display and print webpage contents. Printing of portions of PDF files or maps directly from the websites are more convenient now

Flexible and advanced security features to protect valuable information



Authentication on the MFP main unit

User can perform authentication directly on the main unit. Access control can be set up for functions like print, scan, copy and fax1

*1 Optional Fax Kit FK-513 is required.

IC card authentication

Users can authenticate *2 with various types of IC card*3. The authentication method complies with SSFC (Shared Security Formats Cooperation). Besides the IC Card, users can authenticate with Android devices* with equipped NFC antenna.




- *2 Compliant non-contact IC cards include FeliCa (Idm), SSFC, FCF, FCF (campus), FeliCa Private, and MIFARE (UID).
 *3 Requires Android 4.4 or later that supports HCE (Host Card Emulation) or PageScope Mobile for Android v4.1 or late

Biometric authentication

Scans the veins on the finger as the biometric data which offers very high-level security and is easy to implement 4

*4 Optional Biometric Authentication Unit AU-102 and Working Table WT-506 are required.

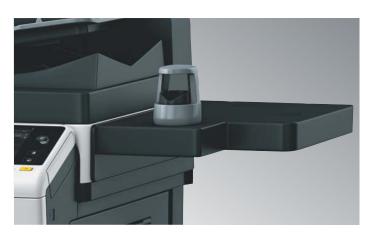

HDD mirroring

Supports "Mirroring" which synchronizes the main HDD data and backup HDD data in real time. In the event of main HDD failure, operation automatically switches to the backup HDD which will drastically reduce the risk of data loss.

* Optional HDD Mirroring Kit HD -524 is required.

Server-less pull printing


With server-less pull printing, print jobs sent by user can be printed from any MFP in the same network.

- * A pull printing system consisting of a maximum of 10 MFPs can be created. It is necessary that all corresponding MFPs be in the same network.
 * Optional i-Option LK-114 and Upgrade Kit UK-211 are required to be installed to each of the MFP.

TPM (Trusted Platform Module)

TPM (Trusted Platform Module) is a security chip which encrypts and decrypts confidential data. The information is encrypted and stored in dedicated storage area in the chip to avoid unauthorized reading.

* Optional i-Option LK-115 v2 is required.

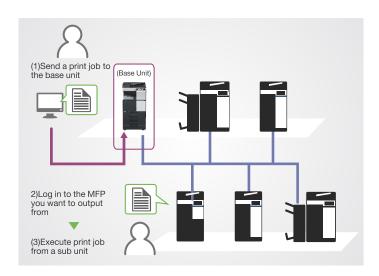


Environmental contribution is always the top priority


Top class power consumption and TEC value in its class


The MFP's CPU power is set to turn off during sleep mode. This results in a best-inclass 0.5 W power consumption ratio (during sleep mode). The TEC value has also been reduced approximately by 5-18%. CO₂ emission from the MFP is drastically

SYSTEM

- Upgrade kit UK-211 2 GB memory
- Upgrade kit UK-212 Wireless LAN kit * EK-608 or EK-609 is required.
- Keypad KP-101
- Device Connection I/F Kit EK-608 USB hub kit / Voice guidance
- Device Connection I/F Kit EK-609 Bluetooth LE / Voice guidance
- bizhub Connector S-1/G-1/E-1

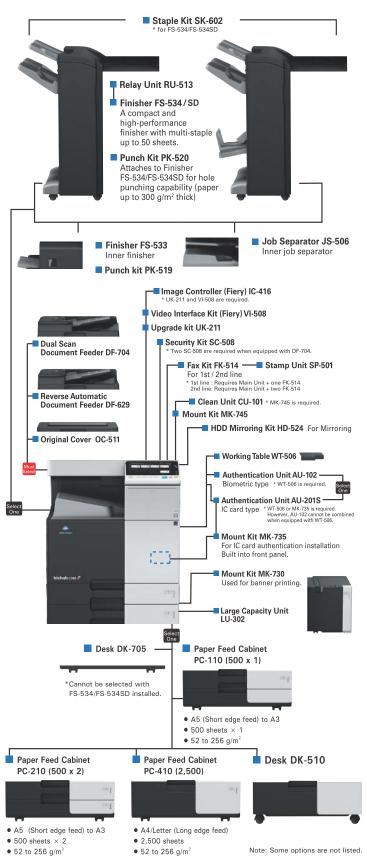





bizhub C368/C308/C258 Printer Specifications

		bizhub C368	bizhub C308	bizhub C258
Type		Embedded		
CPU		ARM Cortex-A7 Dua	l-core 1.2GHz	
Memory		2 GB/4 GB		
Print Speed		36 ppm	30 ppm	25 ppm
HDD		250 GB (Shared with the	250 GB (Shared with the copier)	
Print Resolution			1,800 dpi (equivalent) × 600 dpi (at smoothing) or 1,200 dpi × 1,200 dpi (in 1,200 dpi mode)	
PDL		PCL 6, PostScript 3 Er	PCL 6, PostScript 3 Emulation, XPS	
Protocol		TCP/IP, IPX/SPX (NDS SNMP, AppleTalk	support), SMB (NetBEUI),	LPD, IPP1.1,
Support OS		Windows Server 2008	Windows Vista" / 7" / 8" / 8.1" / 10" Windows Server 2008" / 2008 R2 / 2012 / 2012 R2 Mac OS X (10.6 / 10.7 / 10.8 / 10.9 / 10.10 / 10.11) Linux	
Fonts	PCL	80 Roman fonts		
	PS	137 Roman Type1 font	S	
Interface		Ethernet (10BASE-T/1) IEEE 802.11 b/g/n ²	00BASE-TX/1000BASE-T)	, USB 1.1, USB 2.0,

*1 Supports the 32-bit (x86) or 64-bit (x64) environment.
*2 Optional

Scanner Specifications

Type		Full-Colour Scanner
Interface		Ethernet (10BASE-T/100BASE-TX/1000BASE-T), IEEE 802.11 b/g/n*1
Driver		TWAIN Driver, HDD TWAIN Driver
Protocol		TCP/IP (FTP, SMB, SMTP, WebDAV) (IPv4/IPv6)
Scanning Speed (Colour/B&W) (300 dpi, A4, Simplex)		80 opm ¹²
Scanning Size		Max. A3 (11" x 17")
Output Format		TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS, OOXML (pptx, xlsx ⁻¹ , docx ⁻¹), Searchable PDF ⁻¹ , PDF/A ⁻¹ , Linearised PDF ⁻¹
Scanning Resolution	Push	200 dpi / 300 dpi / 400 dpi / 600 dpi
	Pull	100 dpi / 200 dpi / 300 dpi / 400 dpi / 600 dpi
Main Functions		Scan to E-Mail, Scan to FTP, Scan to BOX (HDD), Scan to PC (SMB),Network TWAIN, Scan to WebDAV, Scan to USB, Scan to Scan Server, Scan to Web Service (WSD-Scan),Device Profile for Web Services (DPWS)
Other Functions		Multi-Method Send, Authentication at the time of E-Mail send (SMTP authentication, POP before SMTP), S/MIME, Annotation

Type			3 Multifunctional Printer	
Colour Support		Full colour		
Colour Resolution		Main: 600 dpi x Sub: 6	300 dpi	
Gradation		256		
Memory Capacity	(Std./Max.)	2 GB/4 GB		
HDD		250 GB		
Original Type		Sheets, Books, Objects		
Max. Original Siz	е	A3 (11" × 17")		
Output Size		Main unit: SRA3', A3 to A5, 12-14* x 18' A3 wide (31.1 mm x 457.2 mm)), 11* x 17* to 8-1/2' x 11*, 5-1/2' x 8-1/2', 8" x 13", 16K, 8K Bypass Tray. SRA3, A3 to A5, B6', A6', 12* x 18' (A6 wide (31.1 mm x 457.2 mm)), 11* x 17* to 5-1/2* x 8-1/2 8' x 13"', 16K, 8K, Postcard (A6 (4* x 6* Card)), Envelope ⁵ , Label sheet, Tab pages, Eanner pager (Width: 210 mm to 297 mm (6-1/4* to 1-11-11/16'), Length: 457 mm to 1,200 mm (18" to 47-1/4")) ⁵		
Warm-Up Time ³⁷ (23°C, std. voltage) * The time required to start printing when both the main power and sub-power switches are turned from OFF to ON.		Colour / B & W: 20 ser	c. or less	
* The time required to start printing when both the main power and sub-power switches are turned from OFF to ON.		Colour / B & W: 20 ser	c. or less Colour / B & V	V: 18 sec. or less
First Copy Out	Colour	6.9 sec. or less	7.3 sec. or less	7.5 sec. or less
Time*8	B/W	5.3 sec. or less	5.6 sec. or less	6.1 sec. or less
Copy Speed (Col		36 ppm	30 ppm	25 ppm
Сору	Fixed Same Magnification	1: 1±0.5% or less		
Magnification	Scaling Up	1: 1.154/1.224/1.414/2.000		
	Scaling Down	1: 0.866/0.816/0.707/0.500		
	Preset	3 types		
	Zoom	25 to 400% (in 0.1% increments)		
	Lengthwise Crosswise Individual Settings	25 to 400% (in 0.1% increments)		
Paper Capacity	Tray 1	500 sheets (up to A3	3)	
(80 g/m²)	Tray 2	500 sheets (up to SRA3)		
	Multiple Bypass Tray	150 sheets (up to SRA3)		
Max. Paper Capacity (80 g/m²)*9		6,650 sheets		
Paper Weight	Tray 1 / 2	52 to 256 g/m²		
Multiple BypassTray		60 to 300 g/m ²		
Multiple Copy		1 to 9,999 sheets		
Auto Duplex	Paper Size		de (311.1 mm × 457.2 '4" × 10-1/2", 8" × 13",	
	Paper Weight	52 to 256 g/m²		

Power Requirements	AC220 to 240 V 8.0 A (50/60 Hz)
Max. Power Consumption	1.5 kW or less
Dimensions [W] × [D] × [H]	615 × 685 × 779 mm (24-3/16' × 27-15/16" × 30-11/16')
Weight	Approx. 85 kg (187-3/8 lb)
Space Requirements (WI x IDI*10	937 × 1,214 mm (36-7/8" × 47-13/16")

*1 SRA3 paper can be used in Tray2.

*2 There are four types of foolscap: 8-1/2" x 13-1/2", 8-1/2" x 13"", 8-1/4" x 13"", and 8" x 13"", Any one of these sizes is selectable. For details, contact your service representative.

*3 Short edge feed

*4 There are six types of foolscap: 8-1/2" x 13-1/2"", 220 mm x 330 mm⁻¹, 8-1/2" x 13"", 8-1/4" x 13"¹, 8-1/8" x 13-1/4"³, and 8" x 13"³ Any one of these sizes is selectable. For details, contact your service representative.

- Any one of these sizes is selectable. For details, contact your service representative.

 15. Whirkles or printing errors may occur due to the type, storage or environment that exists when envelope printing is carried out.

 16. Printing on banner paper can only be performed from a PC.

 17. May vary depending on the operating environment and usage.

 18. A4 long edge feed full sizefusing the first tray/scanning from the original glass surface.

- *10 Without options, with paper trays pulled out, and multiple bypass tray, auxiliary tray and ADF opened.

iiicoiiiot i ux	
Protocol	TX: SMTP, RX: POP3, TCP/IP Simple mode
Connection Mode	Full-Mode
Sending Paper Size	A3, B4, A4
Recording Paper Size	Max. A3
Resolution	B/W: 200 × 100 dpi, 200 × 200 dpi, 400 × 400 dpi, 600 × 600 dpi
	Colour: 200 × 200 dpi, 400 × 400 dpi, 600 × 600 dpi
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)
Colour	Support Colour Internet Fax
Format	B/W: TIFF-F Colour: TIFF (Conforms to BEC3949 Profile-C)

Eav Kit EK-514 (Ontional)

Communication	Super G3
Compatible Lines	Public Switch Telephone Network, Private Branch Exchange, Fax Communication Line
Line Density	Ultra Fine: 600 dpi 600 dpi Super Fine: 16 dot/mm 15.4 line/mm, 400 dpi 400 dpi Fine: 8 dot/mm 7.7 line/mm, 200 dpi 200 dpi Normal: 8 dot/mm 3.85 line/mm
Modem Speed	2.4 to 33.6 kbps
Compression	MH/MR/MMR/JBIG
Sending Paper Size	Max. A3 (Long Length Support: Max.1,000 mm)
Recording Paper Size	Max. A3 (Long Length Max. 1,000 mm following the page division)
Transmission Speed	Less than 2 sec. (A4, V.34, 33.6 kbps, JBIG)
Memory	Shared with the copier
Number of Abbr. Dials	2,000
Number of Program Dials	400
Number of Group Dials	100
Sequential Multiple Station Transmission	Max. 600

IP Address Fax

Protocol Transmission		TCP/IP, SMTP
Sending Paper Size		A3, B4, A4
Resolution		200 × 200 dpi, 400 × 400 dpi, 600 × 600 dpi
	Format	BM:TIFF-F,TIFF-S

Reverse Automatic Document Feeder DF-629 (Optional)



Dual Scan Document Feeder DF-704 (Optional)

Dual Scan Document Feeder DF-704 (Optional)		
Type		Single pass simultaneous duplex system
Support Paper Size		Max. A3 (Fax mode: Max. 1,000 mm)
Mixed Size		Support
Original Set		Centre guide
Support Paper Weight		Thin paper: 35 to 49 g/m² (Simplex)
		Plain paper: 50 to 163 g/m² (Simplex/Duplex), 50 to 128 g/m² (Mixed Original)
Paper Capacity		Max. 100 sheets (80 g/m²)
Productivity (A4) Simplex		Colour/B&W: 80 opm (300 dpi), 55 opm (600 dpi)
	Duplex	Colour/B&W: 160 opm (300 dpi), 110 opm (600 dpi)
Power Requirements		Supplied from the MFP main body
Dimensions [W] × [D] × [H]		611 × 504 × 142 mm (24-1/16" × 19-13/16" × 5-9/16")
Weight		Approx. 12 kg (26-7/16 lb)

*Optional Fax Kit FK-514 is required.

For more information please visit the bizhub Web site at http://www.biz.konicaminolta.com/colour/c368_c308_c258/index.html

Product appearance, configuration and/or specifications are subject to change without notice.

KONICA MINOLTA, the KONICA MINOLTA logo and symbol mark, "Giving Shape to Ideas", bizhub, bizhub PRC, bizhub PRESS, magicolor, PagePro, PageScope, Simitri, Simitri HD+, Simitri with Biomass, Emperon, S.E.A.D., S.E.A.D.II, Printgroove and Konica Minolta Optimised Print Services and their respective logos are registered trademarks or trademarks of KONICA MINOLTA, INC. Evernote is a registered trademark are trademark of with Evernote Corporation. SharePoint is a registered trademark of Microsoft Corporation in the U.S. and other countries. All other brands and product names are registered trademarks or trademarks of their respective companies or organisations.



Ecology & Environment

KONICA MINOLTA products are designed with the environment in mind.

- Energy Star
- RoHS Compliance
- WEEE Compliance Eco-friendly Toners



Ŧ




- Please read and follow the instruction manual to ensure safe operation.
 - Only operate using appropriate power supply and voltage.
- $\bullet \ Connecting the earth wire to an inappropriate place may cause explosion or electric shock. \ Please connect accordingly.$

For more information: SMS "KM OFFICE" send to 52424 or Call: 1-800-266-2525 Konica Minolta Business Solutions India Pvt. Ltd.: 10th Floor, Building No.8, Tower C, DLF Cyber City, Phase II Gurgaon, Haryana - 122002, India. Board No. +91-124 6652000. URL: www.konicaminolta.in, marcom@bin.konicaminolta.in | Konica Minolta Inc., Tokyo, Japan.



Contact Point:









^{*2} When using the Reverse Automatic Document Feeder DF 628.